



12Z3



12Z3

HALF-WAVE HIGH-VACUUM RECTIFIER

Heater*	Coated Unipotential Cathode	
Voltage	12.6	a-c or d-c volts
Current	0.3	amp.
Maximum Overall Length		4-3/16"
Maximum Diameter		1-9/16"
Bulb		ST-12
Base		Small 4-Pin
Pin 1-Heater		Pin 3-Cathode
Pin 2-Plate		Pin 4-Heater
Mounting Position		Any




BOTTOM VIEW (4G)

HALF-WAVE RECTIFIER

Peak Inverse Voltage			700 max. volts
Peak Plate Current			330 max. ma.
D-C Heater-Cathode Potential			350 max. volts
<i>Typical Operation with Condenser-Input Filter:</i>			
A-C Plate Voltage (RMS)	117	150	235 max. volts
Total Effective Plate-Supply Impedance ^Δ	0 min.	30 min.	75 min. ohms
D-C Output Current	55 max.	55 max.	55 max. ma.

- ^Δ When a filter-input condenser larger than 40 μ f is used, it may be necessary to use more plate-supply impedance than the minimum value shown to limit the peak plate current to the rated value.
- * Under no condition of operation should the normal operating heater voltage of 12.6 volts ever fluctuate to exceed a maximum of 15 volts.

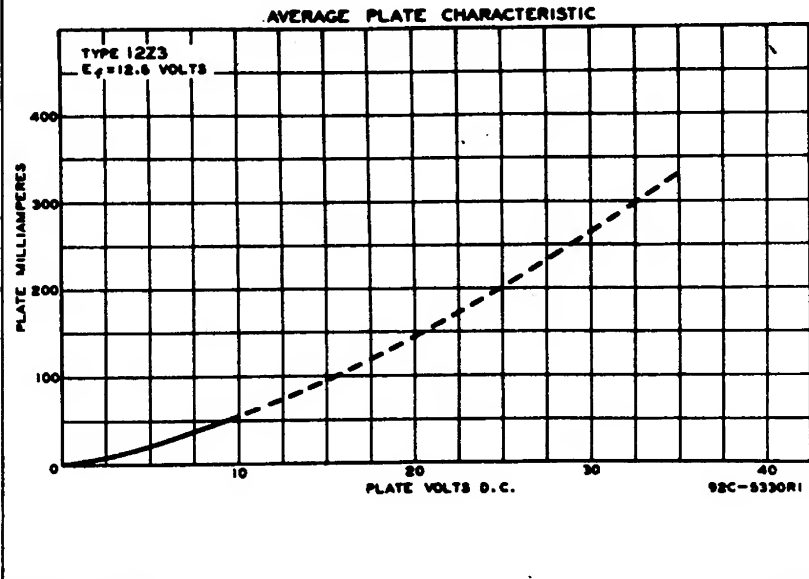

FEB. 2, 1940

RCA RADIOTRON DIVISION
RCA MANUFACTURING COMPANY, INC.


DATA

12Z3



12Z3

OPERATION CHARACTERISTICS

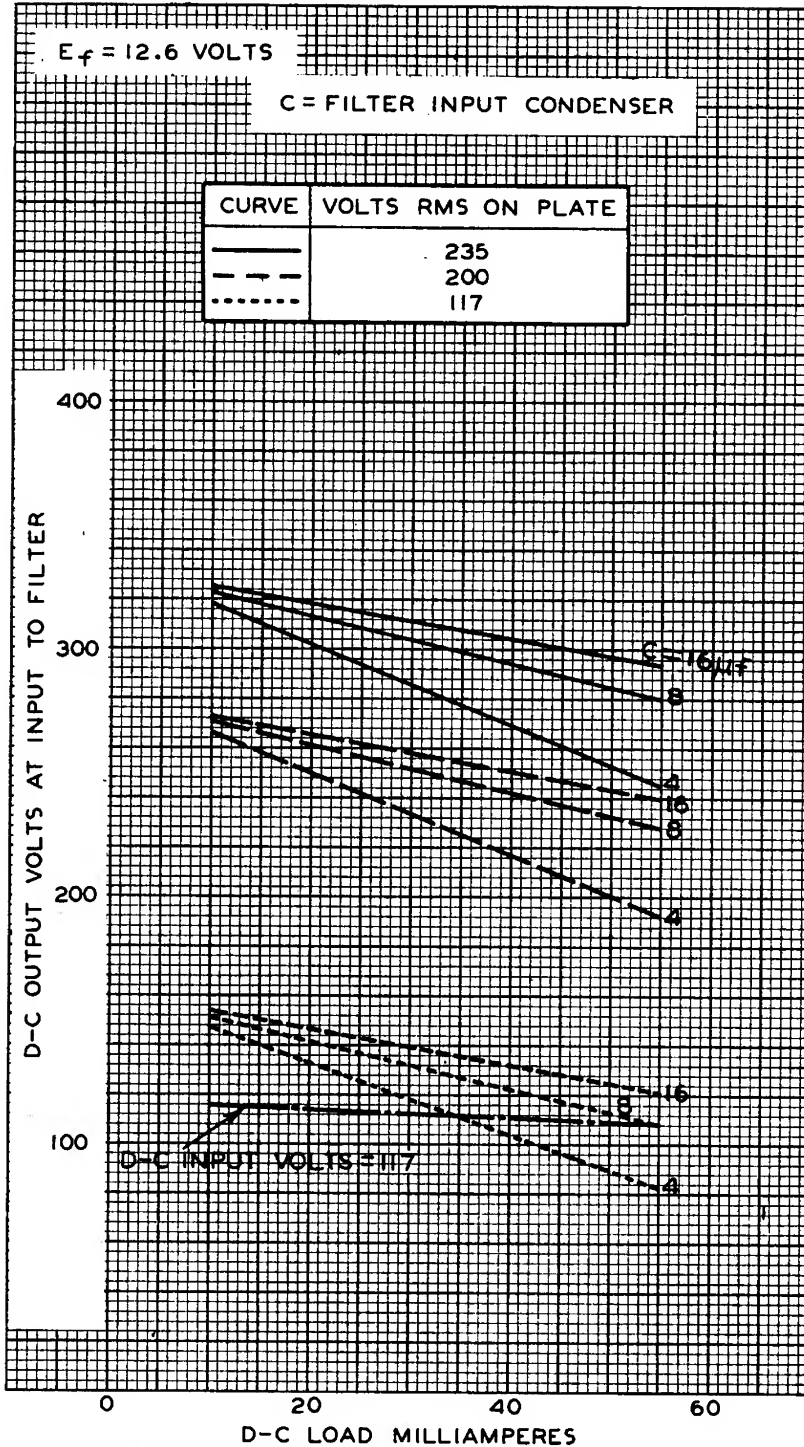

NOV. 27, 1939

RCA RADIODRON DIVISION
RCA MANUFACTURING COMPANY, INC.

92C-5361R1